

# Crystal Clock Oscillator

## NZ2520SEA

## High-precision Crystal Clock Oscillator

### ■ Application

- WiLAN, WiMAX, Bluetooth, PLC, UWB, Car-electronics connection.

### ■ Features

This device is a new SPXO of hold over frequency tolerance as tight as  $\pm 15 \times 10^{-6}$  (-40 to +85°C) by building a temperature compensating circuit in it. CMOS output despite temperature compensated circuit. This device reduces harmonics level to prevent the interference with the radio frequency by the wireless communication use.

- Overall Frequency Tolerance Max.  $\pm 15 \times 10^{-6}$  at -40 to +85°C.
- CMOS output
- Harmonics level reduce.
- Conventional ratio about -17dBm at Output 40MHz,  $V_{CC}$  2.8V, 2.4GHz band.
- Supply voltage : 1.8  $\pm$  0.09V, 2.5  $\pm$  0.125V, 3.3  $\pm$  0.165V. \*1
- Package Size : 2.5 x 2.0 x 0.8mm



Pb  
Free

RoHS Compliant  
Directive 2011/65/EU

Absolute maximum rating  
Supply Voltage ( $V_{CC}$ ) -0.6 to +6.0 V  
Storage Temperature Range -55 to +125 °C


\*1: Please specify one supply voltage.

### ■ Specifications


Item			Model	NZ2520SEA				
Output Level				CMOS				
Nominal Frequency Range			(MHz)	$2.75 \leq F < 11$	$11 \leq F < 22$	$22 \leq F < 30$	$30 \leq F < 40$	$40 \leq F \leq 54$
Operating Temperature Range			(°C)	−40 to +85				
Overall Frequency Tolerance *2 Max.			(×10 <sup>-6</sup> )	±15				
Current Consumption Max.	During Operation	+1.8 V, +25 °C	(mA)	3.5	4.0	4.5	5.0	6.0
		+2.5 V, +25 °C		4.0	4.5	5.0	5.5	6.5
		+3.3 V, +25 °C		4.5	5.0	5.5	6.0	8.0
	During Standby	+1.8 to +3.3 V, +25 °C	(μA)	10				
V <sub>OL</sub> Max. / V <sub>OH</sub> Min.			(V)	0.2 V <sub>CC</sub> / 0.8 V <sub>CC</sub>				
Tr Max. / Tf Max.			(ns)	5/5 ( at 0.2 to 0.8V <sub>CC</sub> )				
Symmetry Min. to Max.			(%)	45 to 55 ( at 1/2V <sub>CC</sub> )				
Load (C <sub>L</sub> ) Max.			(pF)	15				
Start-up Time Max.			(ms)	10				
Standby function				Available (Three-state)				

\*2: Inclusive of +25°C tolerance, temp. characteristics, and supply voltage change.

### ■ Dimensions

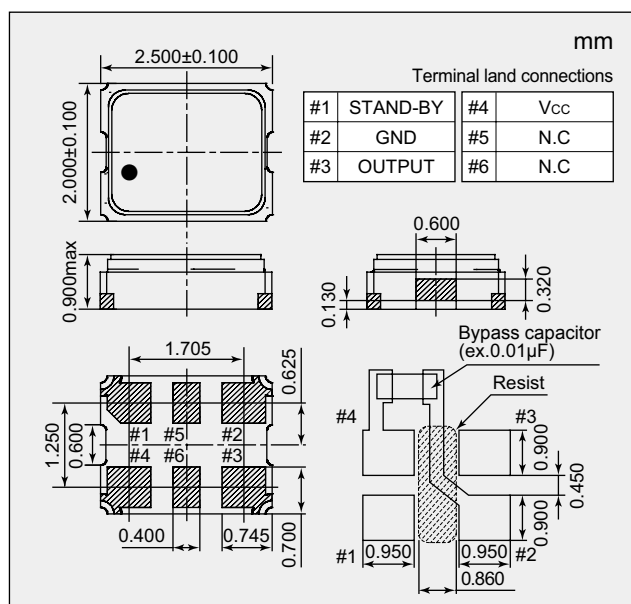

### ■ Output Waveform <CMOS>

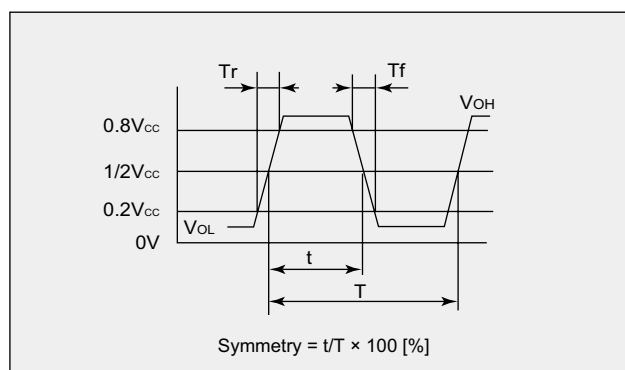

### ■ Standby Function

#1 Input	#3 Output
Level H ( $0.8 V_{CC} \leq V_{IH} \leq V_{CC}$ ) or OPEN	Operating
Level L ( $V_{IL} \leq 0.2 V_{CC}$ )	High impedance

# Crystal Clock Oscillator

## NZ2520SEA

## High-precision Crystal Clock Oscillator

### ■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range(°C)	Supply Voltage (V)		
		+1.8±0.09	+2.5±0.125	+3.3±0.165
±100×10 <sup>-6</sup>	-40 to +125	NSA3513A	NSA3513B	NSA3513C

Please specify the model name, frequency, and specification number when you order products.  
For further questions regarding specifications, please feel free to contact us.